



FEATURES

- Full 63mm O.D. provides 0.3m² of filter area per 10" length
- Precision wound diamond lattice
- Micron accuracy tested
- Wide selection of lengths and micron ratings
- Low pressure drop
- Polypropylene yarn and core for excellent chemical resistance
- Fits any D.O.E style vessel
- Provides a low cost, high surface area, longer continuous high flow operation

String Wound Filter Cartridge

Flowrate@ 20°C

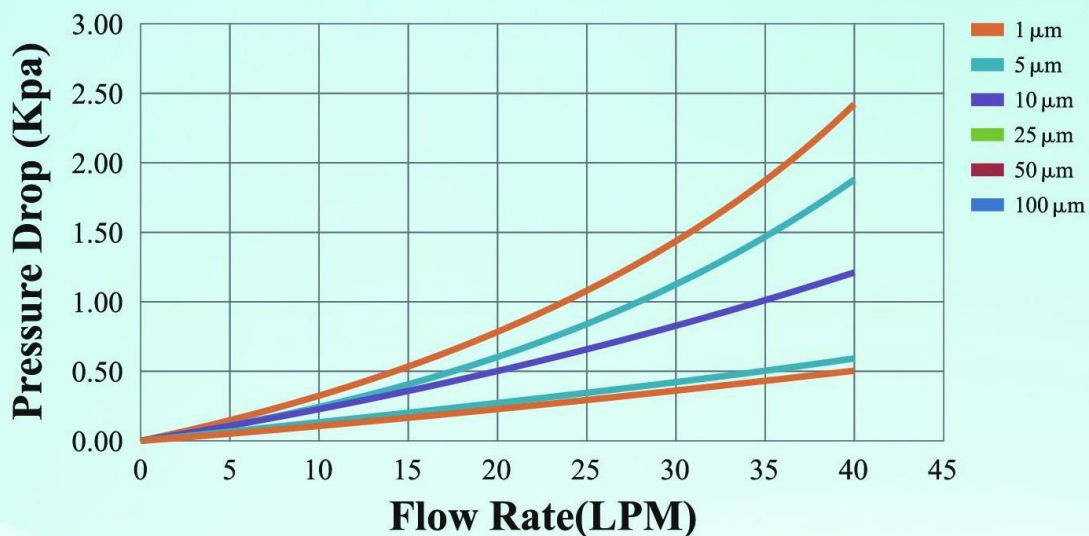



MAXI-DEPTH WOUND FILTER CARTRIDGES

BULLETIN
M-109_Int
June 2014

MODEL	MICRON RETENTION RATING	NOMINAL LENGTH	BOX QTY
01U10U	1	10	15
01U20U		20	15
01U30U		30	15
01U40U		40	10
05U10U	5	10	15
05U20U		20	15
05U30U		30	15
05U40U		40	10
10U10U	10	10	15
10U20U		20	15
10U30U		30	15
10U40U		40	10
20U10U	20	10	15
20U20U		20	15

MODEL	MICRON RETENTION RATING	NOMINAL LENGTH	BOX QTY
20U30U	20	30	15
20U40U		40	10
30U10U	30	10	15
30U20U		20	15
30U30U		30	15
30U40U		40	10
50U10U	50	10	15
50U20U		20	15
50U30U		30	15
50U40U		40	10
100U10U	100	10	15
100U20U		20	15
100U30U		30	15
100U40U		40	10

Also available:

- HI-PERF cartridges for Chromic / Sulphuric / Nitric applications
- Cotton Wound Cartridges
- POLYSPUN Melt-Bonded Filter cartridges
- POLYSERF Pleated Filter cartridge
- Filter Bags, Filter Papers, Filter Rolls



SERFILCO® INTERNATIONAL

Siemens Road, Northbank Industrial Estate
Irlam, Manchester
M44 5AH UK
Email : sales@serfilco-international.com

Tel: +44 161 775 1910
Fax: +44 161 775 3696
Web: www.serfilco.com